GENERAL SPECIFICATIONS

SECTIONS DOOR MODEL_____, SECTIONS ARE _____ THICK ROLL FORMED HOT DIP GALVANIZED QUALITY STEEL. EXTERIOR AND INTERIOR SKINS ARE RAISED PANEL. INSULATION POLYSTYRENE CORE. EXTERIOR AND INTERIOR SKINS ARE SEPARATED TO FORM AN EFFECTIVE THERMAL BREAK. WEATHER-STRIPPING BETWEEN EACH SECTION JOINT FORMS A WEATHERTIGHT SEAL. END STILE ARE MANUFACTURED FROM 16 GAUGE GALVANIZED STEEL. OPTIONAL CENTER STILE MANUFACTURED FROM 18 GAUGE GALVANIZED STEEL ATTACHED TO THE INTERIOR SKIN FULL HEIGHT OF SECTION.

HARDWARE NYLON ROLLERS AND INCLINED TRACK FOR WEATHERTIGHT CLOSURE. TORSION SPRINGS OF OIL TEMPERED WIRE, GALVANIZED CABLES FOR COUNTER-BALANCING. ALL ROLLER HINGES, BRACKET, AND FIXTURES ARE 14 GAUGE GALVANIZED STEEL.

MIDLAND
GARAGE DOOR MFG. Co.

JOB REQUIREMENTS

_____ EA. @ _____ ' _____ " WIDTH X _____ ' _____ " HEIGHT
_____ EA. @ _____ ' _____ " WIDTH X _____ ' _____ " HEIGHT
DOORS TO BE _____ PANELS WIDE AND _____ SECTIONS HIGH.
WINDOW LIGHTS IF REQUIRED, WILL BE _____ X _____ AND WILL BE GLAZED WITH _____ AND WILL BE LOCATED IN SECTION #_____ AND IN PANEL(S) _____
DOORS (IF REQUIRED) WILL ALSO BE FURNISHED WITH;

_____
_____
_____
_____

* NOTE: MIN. 4" WIDE PADS ARE REQUIRED FOR SPRING BRACKET ATTACHMENT AS DICTATED BY DOOR REQUIREMENTS OF SIZE, WEIGHT AND LIFT CLEARANCE. PADS FURNISHED AND INSTALLED BY OTHERS. ALL SPRING MOUNTING PADS TO BE FLUSH WITH JAMB.

* NOTE: SIZE AND DIAMETER OF SPRING WIRE IS DETERMINED BY WEIGHT, AND LIFT OR CYCLE REQUIREMENTS OF THE DOOR. MULTIPLE SPRINGS OR SHAFTS MAY BE NECESSARY.

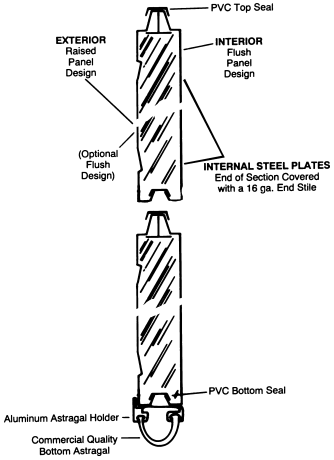

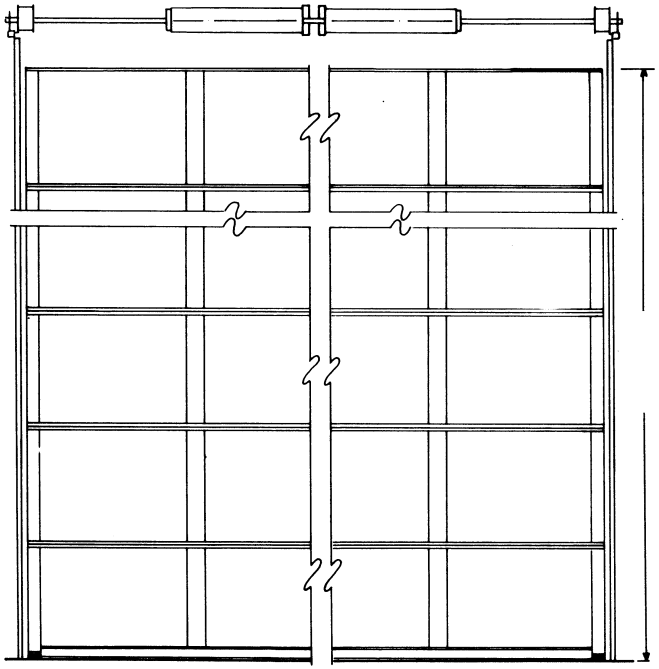

ELEVATION
(NOT TO SCALE)



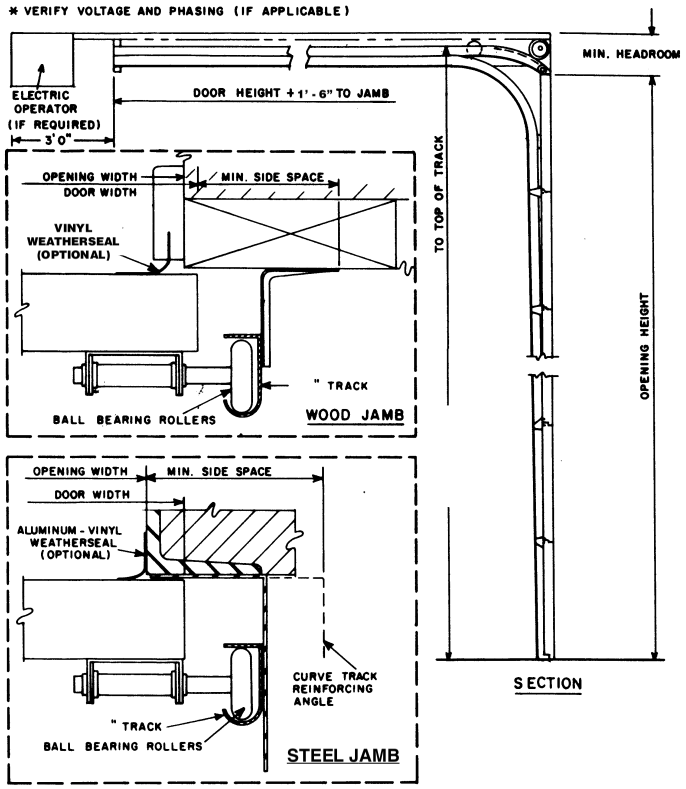

MIDLAND
GARAGE DOOR MFG. Co.

SUPPLIER: _____
ADDRESS: _____
_____
PHONE: ( ) _____

JOB: _____
LOCATION: _____
CONTRACTOR: _____

DATE: _____
DRAWN BY: _____
DRAWING NO. _____

LOW HEADROOM - RESIDENTIAL