

# GARAGE DOORS

RESIDENTIAL PRODUCT GUIDE

QUALITY  
VALUE  
SERVICE




**MIDLAND**<sup>™</sup>  
GARAGE DOOR MFG CO

# NOT ALL GARAGE DOORS ARE CREATED EQUAL


## WHERE IS THE PROOF?

The infrared images below show a side-by-side comparison of a Midland ThermoGuard™ door, next to a competitor's polyurethane door. This was observed with the doors installed next to the other in the same location. The outside temperature was 0°F and the inside temperature was 55°F. The dark areas show where energy loss occurs.

**MIDLAND**  
GARAGE DOOR MFG CO  
THERMOGUARD™ DOOR

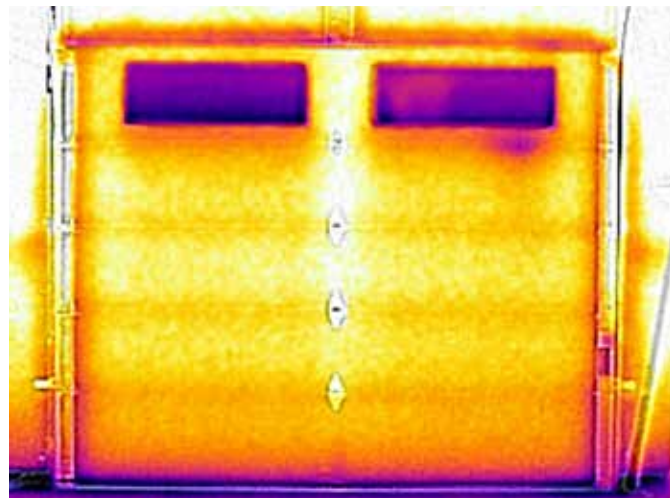


COMPETITOR'S POLYURETHANE DOOR

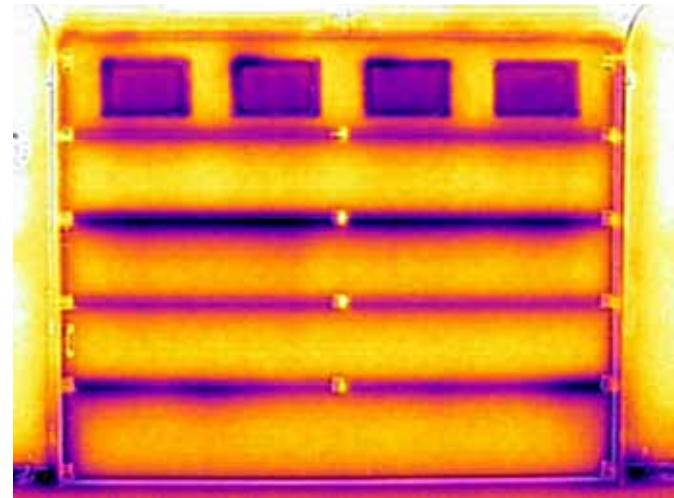

## WHY DO MIDLAND THERMOGUARD™ DOORS PERFORM BETTER?

- 1 TRUE THERMAL BREAK**  
 Midland door sections utilize a true thermal break that minimizes energy loss between sections
- 2 SUPERIOR FIT**  
 Midland door sections have tighter and more consistent section gaps
- 3 STRUCTURAL RIGIDITY**  
 Concealed full-height vertical center stiles and tailor-made custom end stiles provide structural rigidity
- 4 MINIMAL AIR INFILTRATION**  
 A flexible commercial-grade seal between the door sections minimizes air infiltration
- 5 MOISTURE RESISTANT**  
 Closed cell end dams help to keep moisture away from insulation
- 6 QUALITY STEEL**  
 Hot dipped galvanized steel, that is conditioned and embossed with a pebble texture for maximum durability

## DESIGN OPTIONS

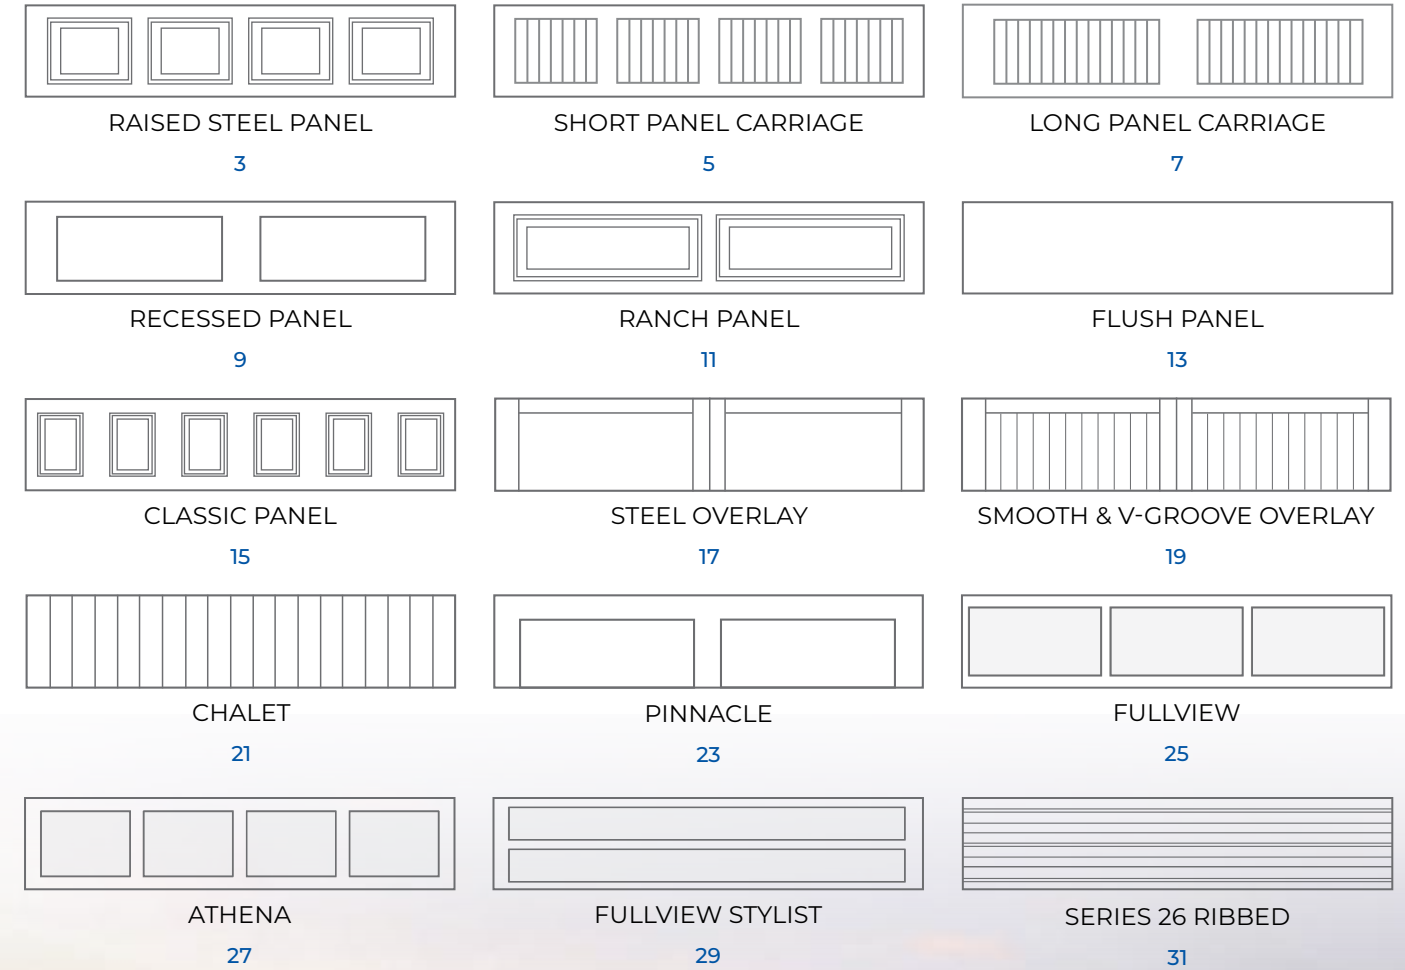

# RAISED STEEL PANEL

**TIMELESS  
TRADITIONAL  
STYLE**



RAISED STEEL PANEL, WHITE

## COLORS



## STEEL EMBOSING



Woodgrain embossing only available in ThermoGuard™ and Series 24

Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## SPECIFICATIONS

	ThermoGuard™	ThermoSteel™	TS-138	Series 24	ValuCraft Plus
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0	<b>0.22</b> 9.25	<b>0.26</b> 7.50	<b>0.38*</b> 7.0*	<b>0.38*</b> 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1 3/8 inches	2 inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge	25 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime *With T-Bond	25 years *With T-Bond
<b>COLORS</b>					
White	•	•	•	•	•
Almond	•		•	•	•
Sandtone	•	•	•	•	•
Tera-Bronze	•	•	•	•	•
Green	•		•		
Gray	•		•		
Coffee	•	•	•	•	•
Black	•	•	•	•	
Light Oak	•	•	•	•	
Dark Oak	•	•	•	•	
Weathered Oak	•		•		
Rosewood		•			
Walnut	•			•	
Ash	•			•	
Color Select**	•	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## GLASS



\*Tempered only.

## STEEL WINDOW GLASS ONLY




## WINDOWS



## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.

# SHORT PANEL CARRIAGE

HANDCRAFTED  
BEAUTY &  
ELEGANCE



SHORT PANEL CARRIAGE, GRAY, LONG PLAIN WINDOWS

## COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL EMBOSING



Color Select™

Woodgrain embossing only available in ThermoGuard™ and Series 24

## SPECIFICATIONS

	ThermoGuard™	ThermoSteel™	TS-138	Series 24
<b>U-Factor</b> R-Value	<b>0.14</b> ✓ 18.0	<b>0.22</b> ✓ 9.25	<b>0.26</b> ✓ 7.50	<b>0.38*</b> ✓ 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime

## COLORS

	ThermoGuard™	ThermoSteel™	TS-138	Series 24
White	•	•	•	•
Almond	•		•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•		•	
Gray	•		•	
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•		•	
Rosewood		•		
Walnut	•			•
Ash	•			•
Color Select**	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## GLASS




\*Tempered only.


## STEEL WINDOW GLASS ONLY



## HARDWARE

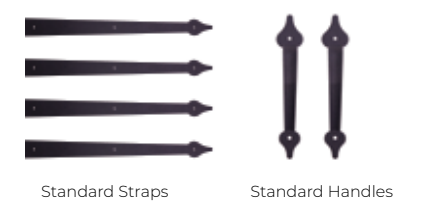


## WINDOWS

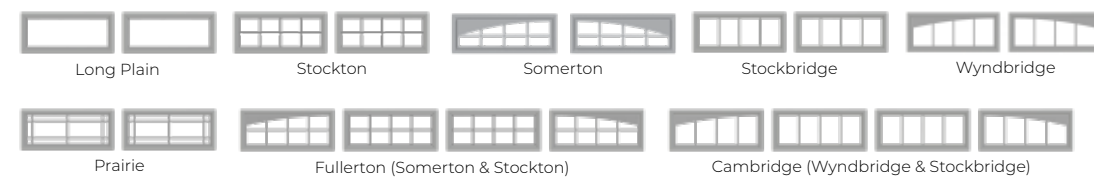

## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.

# LONG PANEL CARRIAGE

CONTEMPORARY  
CHARM &  
STYLE



LONG PANEL CARRIAGE, ROSEWOOD

## COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL EMBOSING



Woodgrain embossing only available in ThermoGuard™ and Series 24

SPECIFICATIONS	ThermoGuard™	ThermoSteel™	TS-138	Series 24
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0	<b>0.22</b> 9.25	<b>0.26</b> 7.50	<b>0.38*</b> 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime
<b>COLORS</b>				*With T-Bond
White	•	•	•	•
Almond	•		•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•		•	
Gray	•		•	
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•		•	
Rosewood		•		
Walnut	•			•
Ash	•			•
Color Select™	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## GLASS




\*Tempered only.


## STEEL WINDOW GLASS ONLY



## HARDWARE

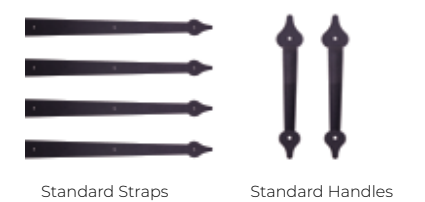


## WINDOWS

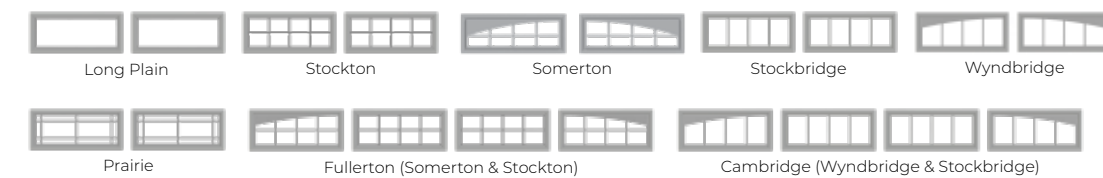

## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.


# RECESSED LONG PANEL

**BOLD & TRADITIONAL REFINEMENT**



RECESSED PANEL, WHITE

## SPECIFICATIONS

<b>U-Factor</b> R-Value	<b>0.14</b> 18.0 
Foam/Insulate	Polyurethane
Thickness	2 inches
Exterior Steel	27 gauge
Interior Steel	27 gauge
Warranty* <i>Excludes Springs</i>	Lifetime

## COLORS

White	•
Almond	•
Sandtone	•
Tera-Bronze	•
Green	•
Gray	•
Coffee	•
Black	•
Light Oak	•
Dark Oak	•
Weathered Oak	•
Walnut	•
Ash	•
Color Select**	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## GLASS

	
Plain	Obscure
	
Bronze	Double Dark*
	
Satin*	Gray
	
Low E	

\*Tempered only.

## STEEL WINDOW GLASS ONLY

	
Smoked	Smoked Satin
	
Black Laminate	White Laminate

## HARDWARE





## COLORS


						
White	Almond	Sandtone	Tera-Bronze	Green	Gray	Coffee
						
Black	Light Oak	Dark Oak	Weathered Oak	Rosewood	Walnut*	Ash*

Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL EMBOSING












	
Pebble	Woodgrain

Woodgrain embossing only available in ThermoGuard™ and Series 24










Color Select™

## WINDOWS

					
Long Plain	Stockton	Somerton	Stockbridge	Wyndbridge	Prairie
					
Fullerton (Somerton & Stockton)	Cambridge (Wyndbridge & Stockbridge)	Cambridge (Wyndbridge & Stockbridge)	Cambridge (Wyndbridge & Stockbridge)	Cambridge (Wyndbridge & Stockbridge)	Cambridge (Wyndbridge & Stockbridge)

## STEEL WINDOWS


Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor

						
12	13	14	62	63	64	68

\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.

# RANCH PANEL

**SIMPLE LINES  
FOR A  
BIG STATEMENT**

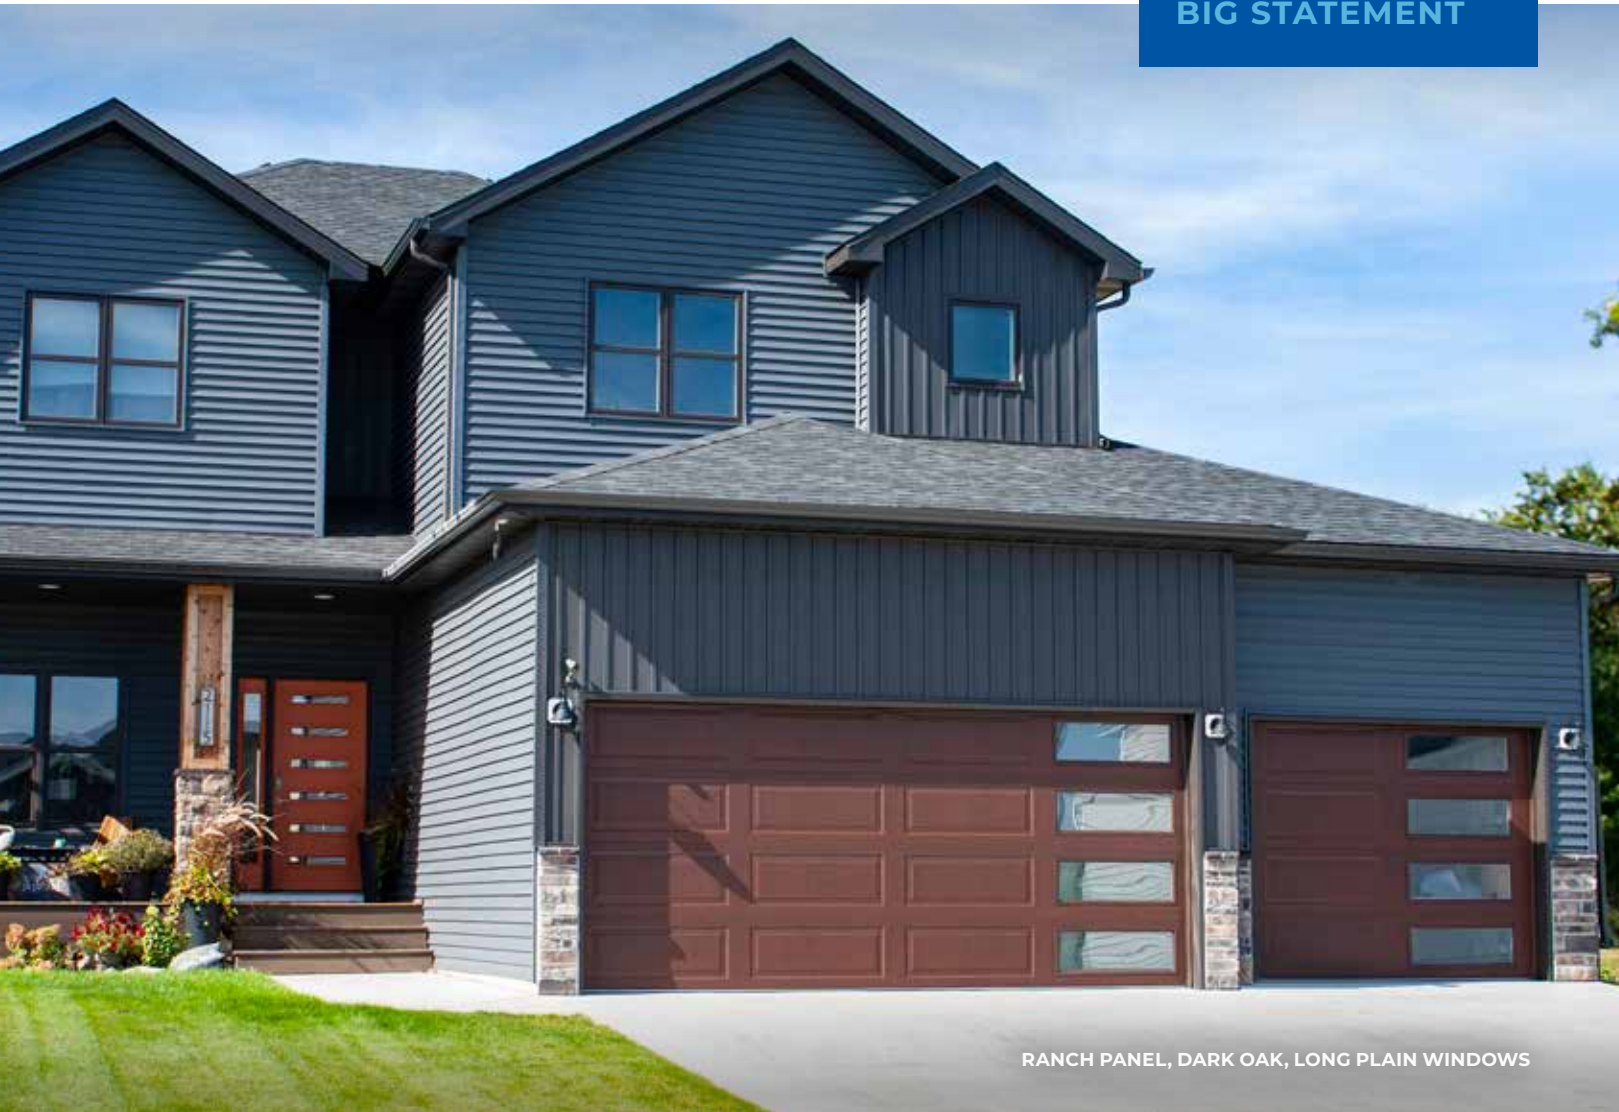

RANCH PANEL, DARK OAK, LONG PLAIN WINDOWS

## COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL EMBOSING



Woodgrain embossing only available in ThermoGuard™ and Series 24

Color Select™

SPECIFICATIONS	ThermoGuard™	ThermoSteel™	TS-138	Series 24
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0	<b>0.22</b> 9.25	<b>0.26</b> 7.50	<b>0.38*</b> 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime *With T-Bond
<b>COLORS</b>				
White	•	•	•	•
Almond	•		•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•		•	
Gray	•		•	
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•		•	
Rosewood		•		
Walnut	•			•
Ash	•			•
Color Select™	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## GLASS




\*Tempered only.


## STEEL WINDOW GLASS ONLY



## HARDWARE

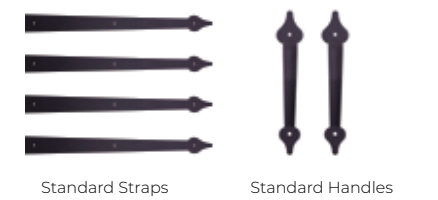


## WINDOWS

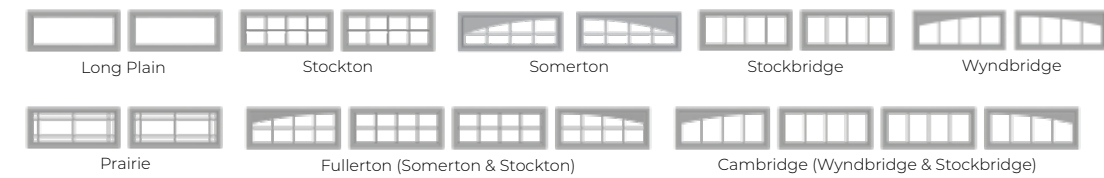

## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.


# FLUSH PANEL

MINIMALIST  
MODERN  
REFINEMENT



FLUSH PANEL, MAHOGANY PLANK, DOUBLE LANDSCAPE WINDOWS

## COLORS

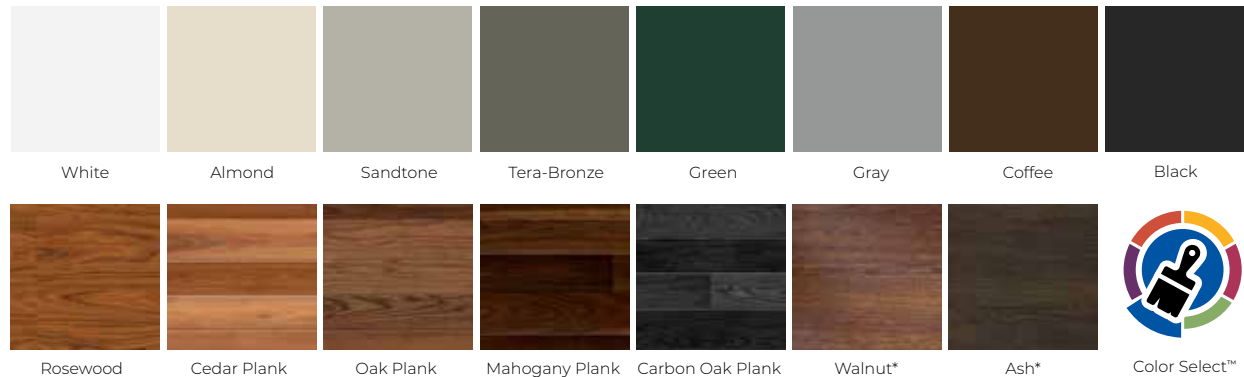

Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

SPECIFICATIONS	ThermoGuard™	ThermoSteel™	TS-138
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0	<b>0.22</b> 9.25	<b>0.26</b> 7.50
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene
Thickness	2 inches	2 inches	1¾ inches
Exterior Steel	27 gauge	25 gauge	27 gauge
Interior Steel	27 gauge	26 gauge	27 gauge
Warranty* Excludes Springs	Lifetime	Lifetime	25 years
<b>COLORS</b>			
White	•	•	•
Almond	•		•
Sandtone	•	•	•
Tera-Bronze	•	•	•
Green	•		•
Gray	•		•
Coffee	•	•	•
Black	•	•	•
Cedar Planks	•		
Oak Planks	•		
Mahogany Planks	•		
Carbon Oak Planks	•		
Rosewood		•	
Walnut	•		•
Ash	•		•
Color Select™	•	•	•
<b>WINDOWS</b>			
Short Plain	•	•	•
Long Plain	•	•	•
24" x 7"	•	•	
24" x 12"	•	•	
Single Landscape	•		
Double Landscape	•		
Steel Windows	•	•	

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.

## STEEL EMBOSSING



Woodgrain embossing only available in ThermoGuard™ and Series 24

## GLASS




\*Tempered only.

## STEEL WINDOW GLASS ONLY



## WINDOWS

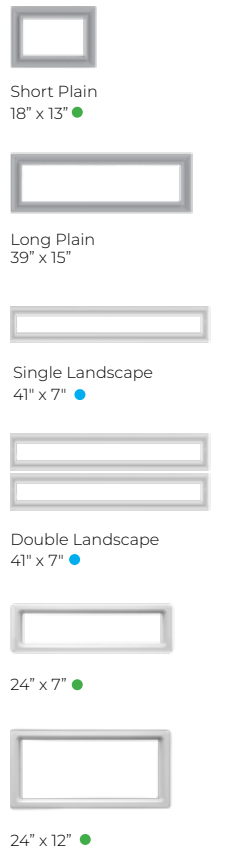


• Not available in Planks  
• Black, White & Plank frames only; Plain, Satin & Double Dark glass only

\*Contact your dealer for custom window options

## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.

# CLASSIC PANEL

TRADITIONAL  
RECTANGULAR  
DESIGN



CLASSIC PANEL, BLACK, STOCKBRIDGE WINDOWS, STANDARD HARDWARE

## COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL EMBOSSING



Woodgrain embossing only available in ThermoGuard™ and Series 24

## SPECIFICATIONS


	ThermoGuard™	ThermoSteel™	TS-138	Series 24
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0	<b>0.22</b> 9.25	<b>0.26</b> 7.50	<b>0.38*</b> 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* Excludes Springs	Lifetime	Lifetime	25 years	Lifetime *With T-Bond
<b>COLORS</b>				
White	•	•	•	•
Almond	•		•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•		•	
Gray	•		•	
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•		•	
Rosewood		•		
Walnut	•			•
Ash	•			•
Color Select™	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.




## WINDOWS

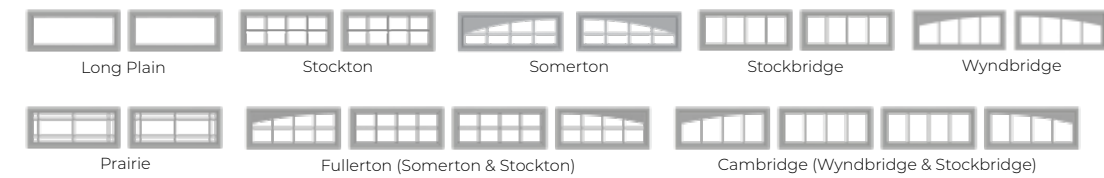

## STEEL WINDOWS

Steel window sections do not qualify for ColorSelect, WindGuard or U-Factor



\*Not Available in Green, Gray, Light Oak, Dark Oak, Planks, or Woodgrain powder coating.  
\*Not Available in TS-138.

## GLASS




\*Tempered only.

## STEEL WINDOW GLASS ONLY



## HARDWARE

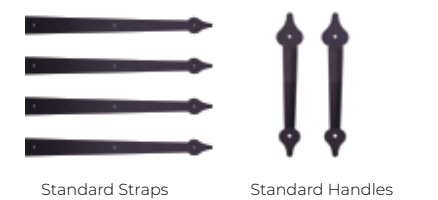


# STEEL OVERLAY

## POLISHED OVERLAY DESIGN



STEEL OVERLAY, BLACK, STOCKTON WINDOWS

### COLORS

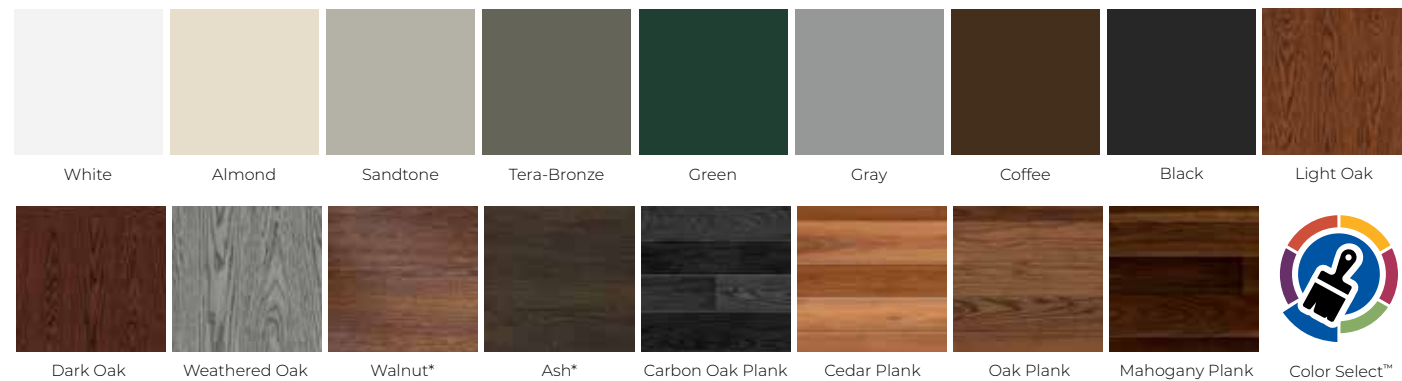

Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

### SPECIFICATIONS

<b>U-Factor</b> R-Value	<b>0.14</b> 18.0
Foam/Insulate	Polyurethane
Thickness	2 inches
Exterior Steel	27 gauge
Interior Steel	27 gauge
Warranty* Excludes Springs	Lifetime

ThermoGuard™

### COLORS


- White •
- Almond •
- Sandtone •
- Tera-Bronze •
- Green •
- Gray •
- Coffee •
- Black •
- Light Oak •
- Dark Oak •
- Weathered Oak •
- Cedar Plank •
- Oak Plank •
- Mahogany Plank •
- Carbon Oak Plank •
- Walnut •
- Ash •
- Color Select™ •

\*For full warranty details contact your Midland dealer


\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



### GLASS

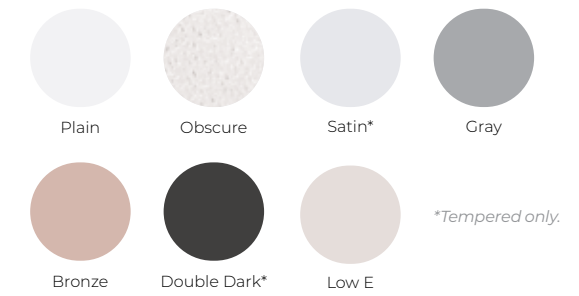

### OVERLAY DESIGNS

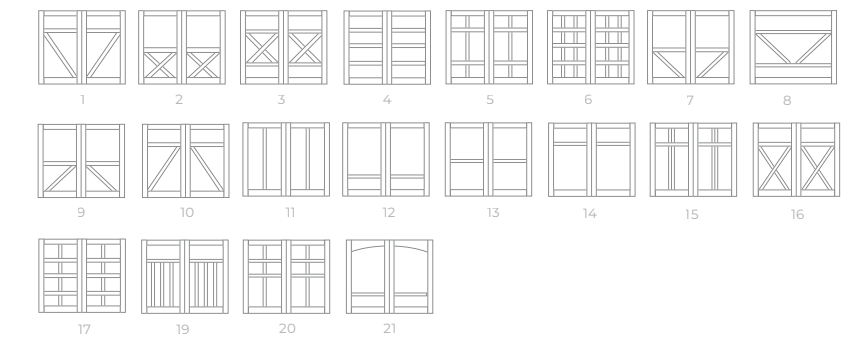

Custom designs available

### HARDWARE




### STEEL EMBOSSING




Woodgrain

### WINDOWS

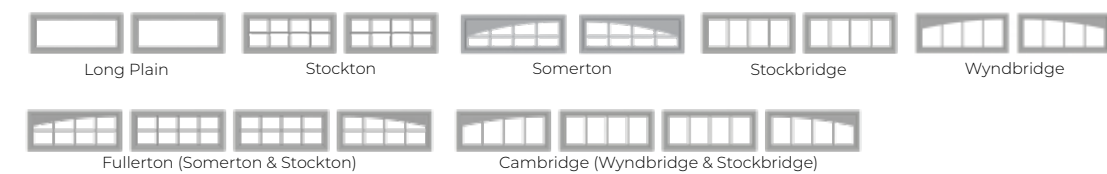

# SMOOTH & V-GROOVE

CLASSIC  
LOOK OF  
REAL WOOD

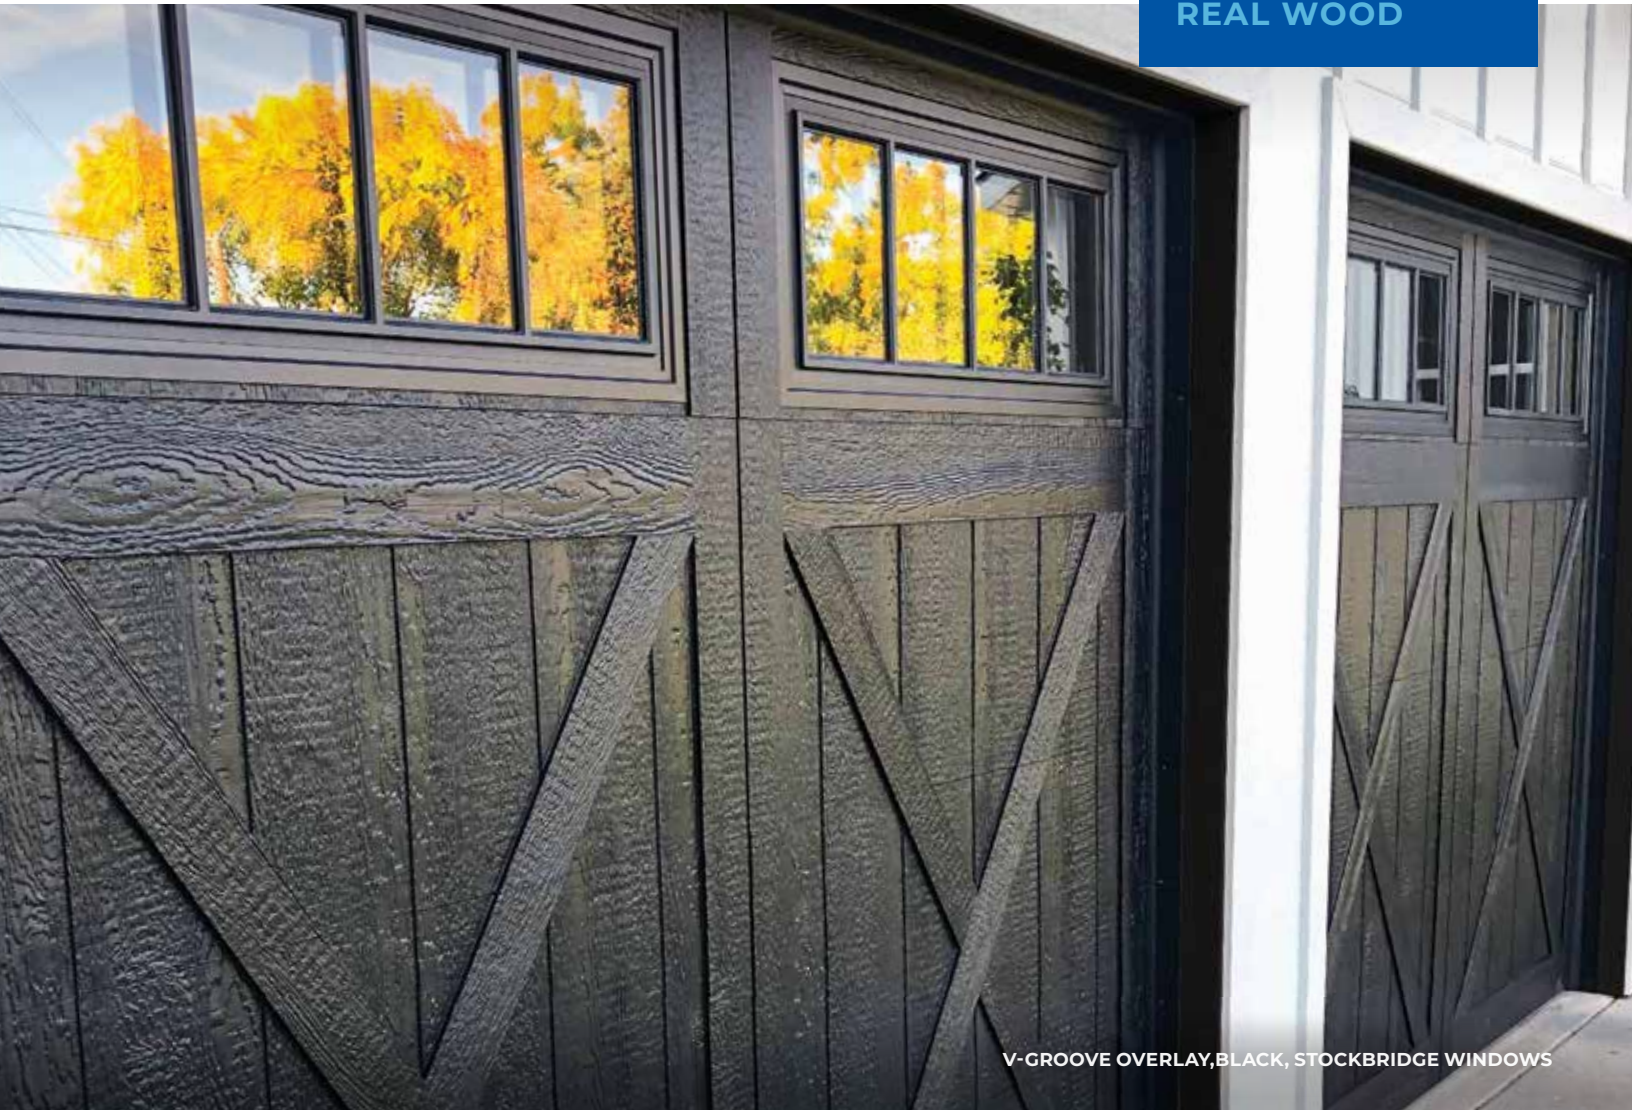

V-GROOVE OVERLAY, BLACK, STOCKBRIDGE WINDOWS

SPECIFICATIONS	ThermoGuard™
<b>U-Factor</b> R-Value	<b>0.14</b> 18.0
Foam/Insulate	Polyurethane
Thickness	2 inches
Exterior Steel	27 gauge
Interior Steel	27 gauge
Warranty* Excludes Springs	Lifetime

COLORS	
White	•
Almond	•
Sandtone	•
Tera-Bronze	•
Green	•
Gray	•
Coffee	•
Black	•
Color Select™	•

**GLASS**

**OVERLAY DESIGNS**

Custom designs available

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



**HARDWARE**

**COLORS**


Printed colors may not be accurate. Contact your Midland dealer for exact color samples

**PANEL DESIGN**

**WINDOWS**

# CHALET


RUSTIC CHARM,  
UPSCALE  
PRESENCE

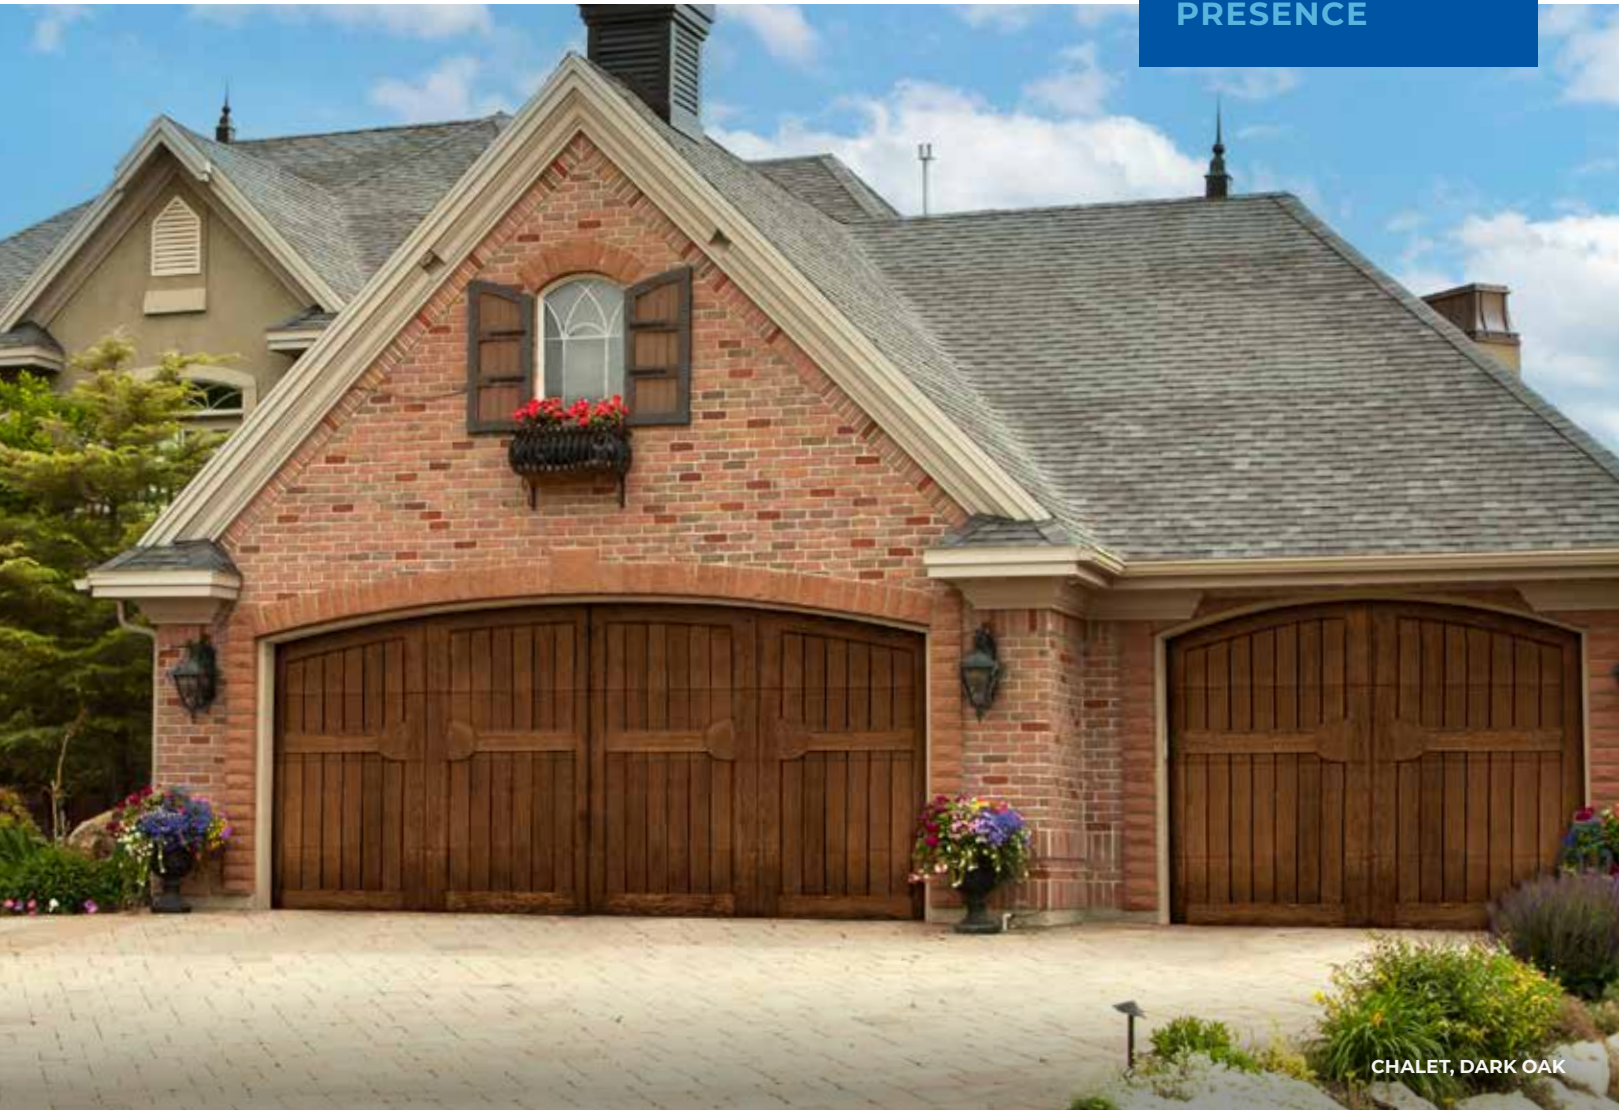

CHALET, DARK OAK

## SPECIFICATIONS

ThermoGuard™

<b>U-Factor</b> R-Value	<b>0.14</b> 18.0 
Foam/Insulate	Polyurethane
Thickness	2 inches
Exterior Steel	27 gauge
Interior Steel	27 gauge
Warranty* <i>Excludes Springs</i>	Lifetime

## COLORS


- White •
- Almond •
- Sandtone •
- Tera-Bronze •
- Green •
- Gray •
- Coffee •
- Black •
- Walnut •
- Ash •

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.




## WOOD STAINS

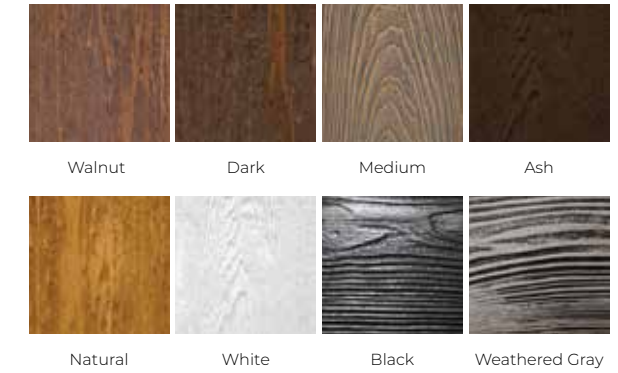


## WOOD SPECIES



## CHALET DESIGNS

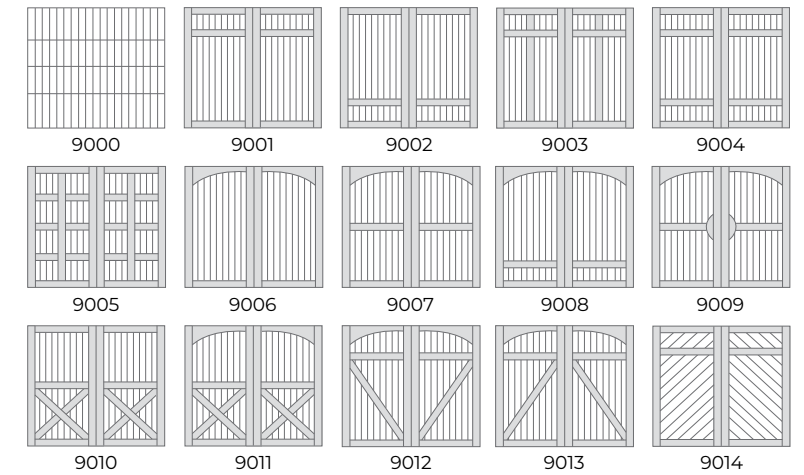

## COLORS

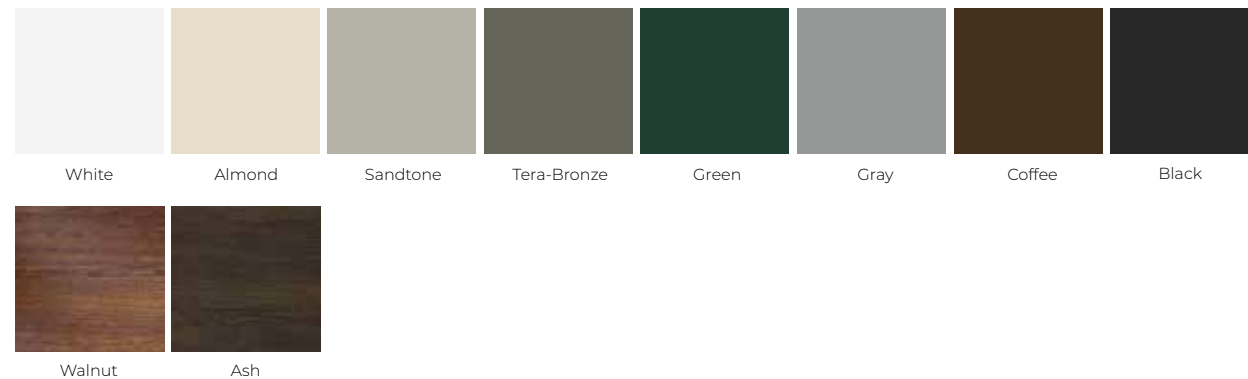

• Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
• Woodgrain embossing only


## FAUX ON FAUX

- Polyurethane Faux Trim
- Polyurethane Faux Boards
- 27 Gauge Steel
- Polyurethane Hardboard
- 27 Gauge Steel Backing

## FAUX ON STEEL

- Polyurethane Faux Trim
- 27 Gauge Steel
- Polyurethane Hardboard
- 27 Gauge Steel Backing

## HARDWARE

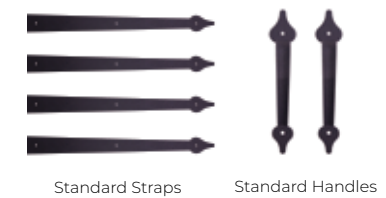


# PINNACLE

THE PEAK OF PREMIUM PANEL DESIGN




STEEL PINNACLE, ASH, SHORT PANEL V-GROOVE


## ALUMINUM DESIGNS

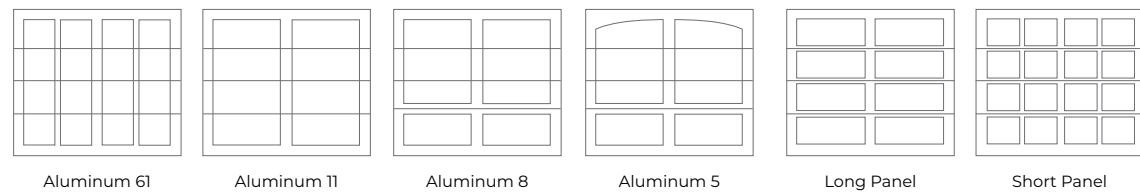

## STEEL DESIGNS

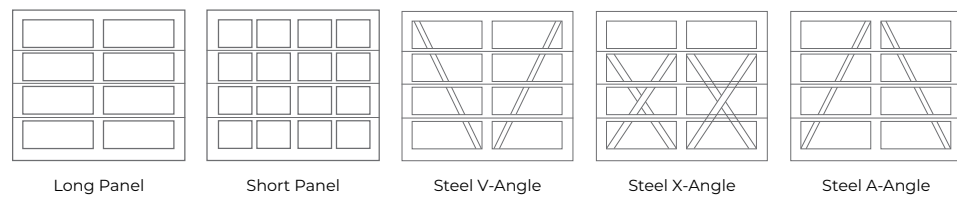

## STEEL GROOVE OPTIONS



## SPECIFICATIONS


	Aluminum Pinnacle	Steel Pinnacle
<b>U-Factor</b>	Not Tested	Not Tested
Standard	Non-Insulated	Non-Insulated
With Insulation	Polystyrene	Polystyrene
Thickness	2 inches	2 inches
Exterior Steel	18 gauge	24 gauge
Interior Steel	28 gauge	28 gauge
Warranty* Excludes Springs	Lifetime	Lifetime

## GLASS




\*Tempered only.

## HARDWARE

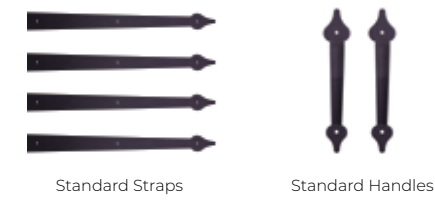

\*Only available in Aluminum Pinnacle

## LAMINATE




## ALUMINUM COLORS


### SOLID POWDER COAT



### WOODGRAIN POWDER COAT

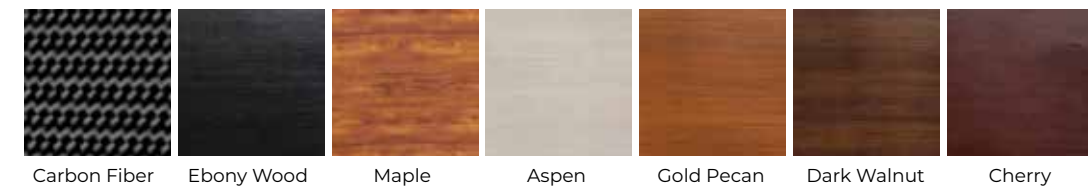


## STEEL COLORS

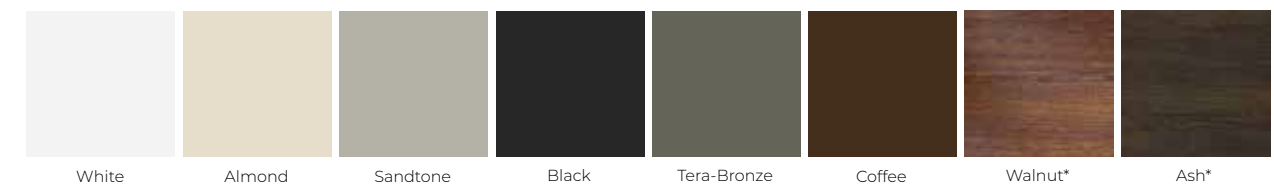

Printed colors may not be accurate. Contact your Midland dealer for exact color samples  
\*Woodgrain embossing only

## STEEL & ALUMINUM WINDOWS


Steel & Aluminum Window sections do not qualify for WindGuard or U-Factor

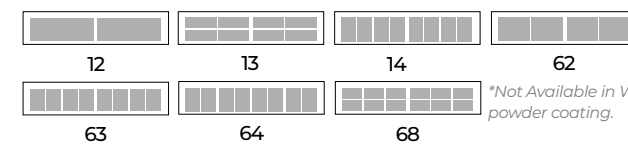

\*Not Available in Woodgrain powder coating.

## ALUMINUM WINDOWS

Aluminum Window sections do not qualify for WindGuard or U-Factor

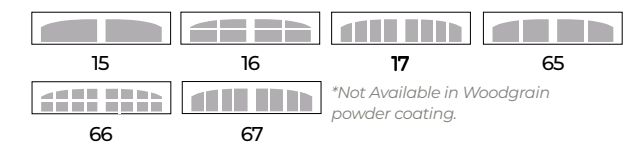


\*Not Available in Woodgrain powder coating.




# FULLVIEW

SLEEK LINES  
OF STYLISH  
GLASS

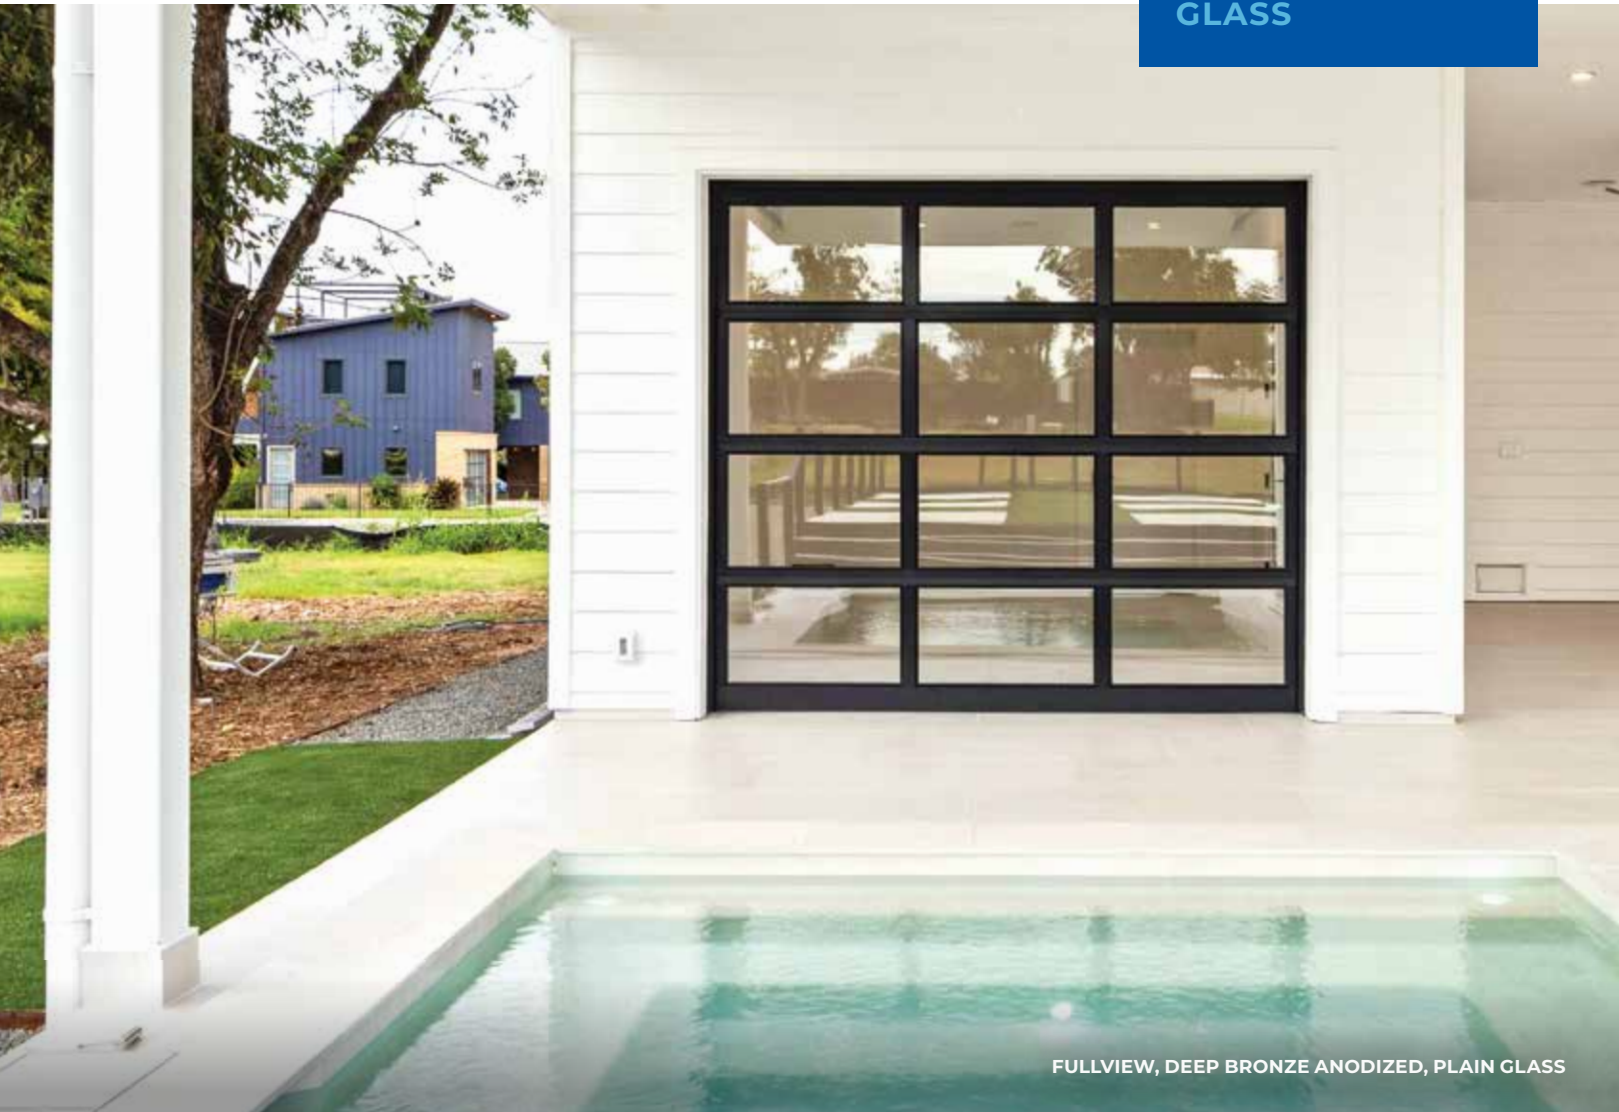


FULLVIEW, DEEP BRONZE ANODIZED, PLAIN GLASS

## FRAME COLORS

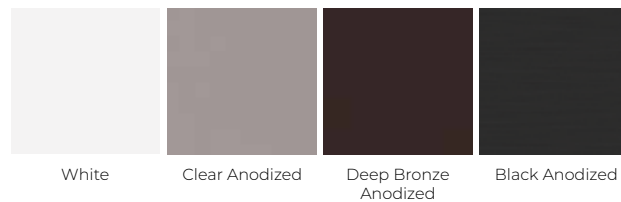

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

## SPECIFICATIONS


<b>U-Factor</b>	<b>0.85</b> 
<b>Frame</b>	6063-T Aluminum
<b>Thickness</b>	2 inches
<b>Glass</b>	½ inch insulated ¼ inch non-insulated ⅜ inch non-insulated
<b>Panel</b>	—
<b>Rails</b>	Insulated non-insulated
<b>Air Infiltration Seal</b>	•
<b>Warranty*</b> <i>Excludes Springs</i>	5 years

\*For full warranty details contact your Midland dealer

## GLASS




\*Tempered only.

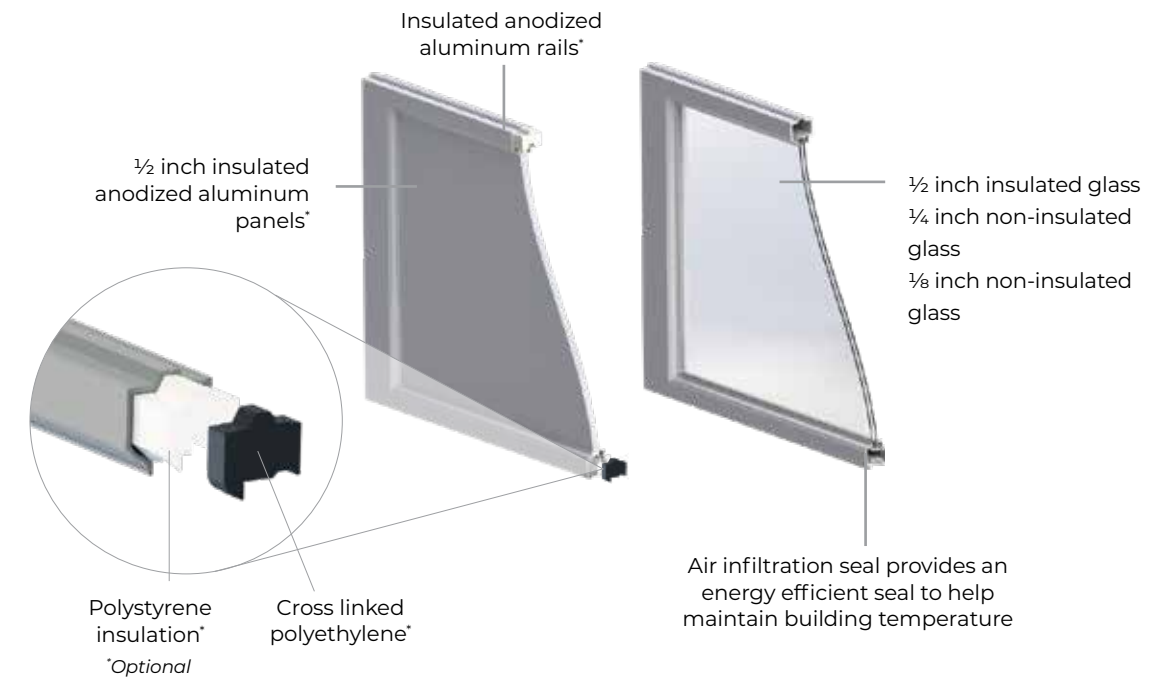

# ATHENA

ELEGANT  
SOPHISTICATED  
FRAMES

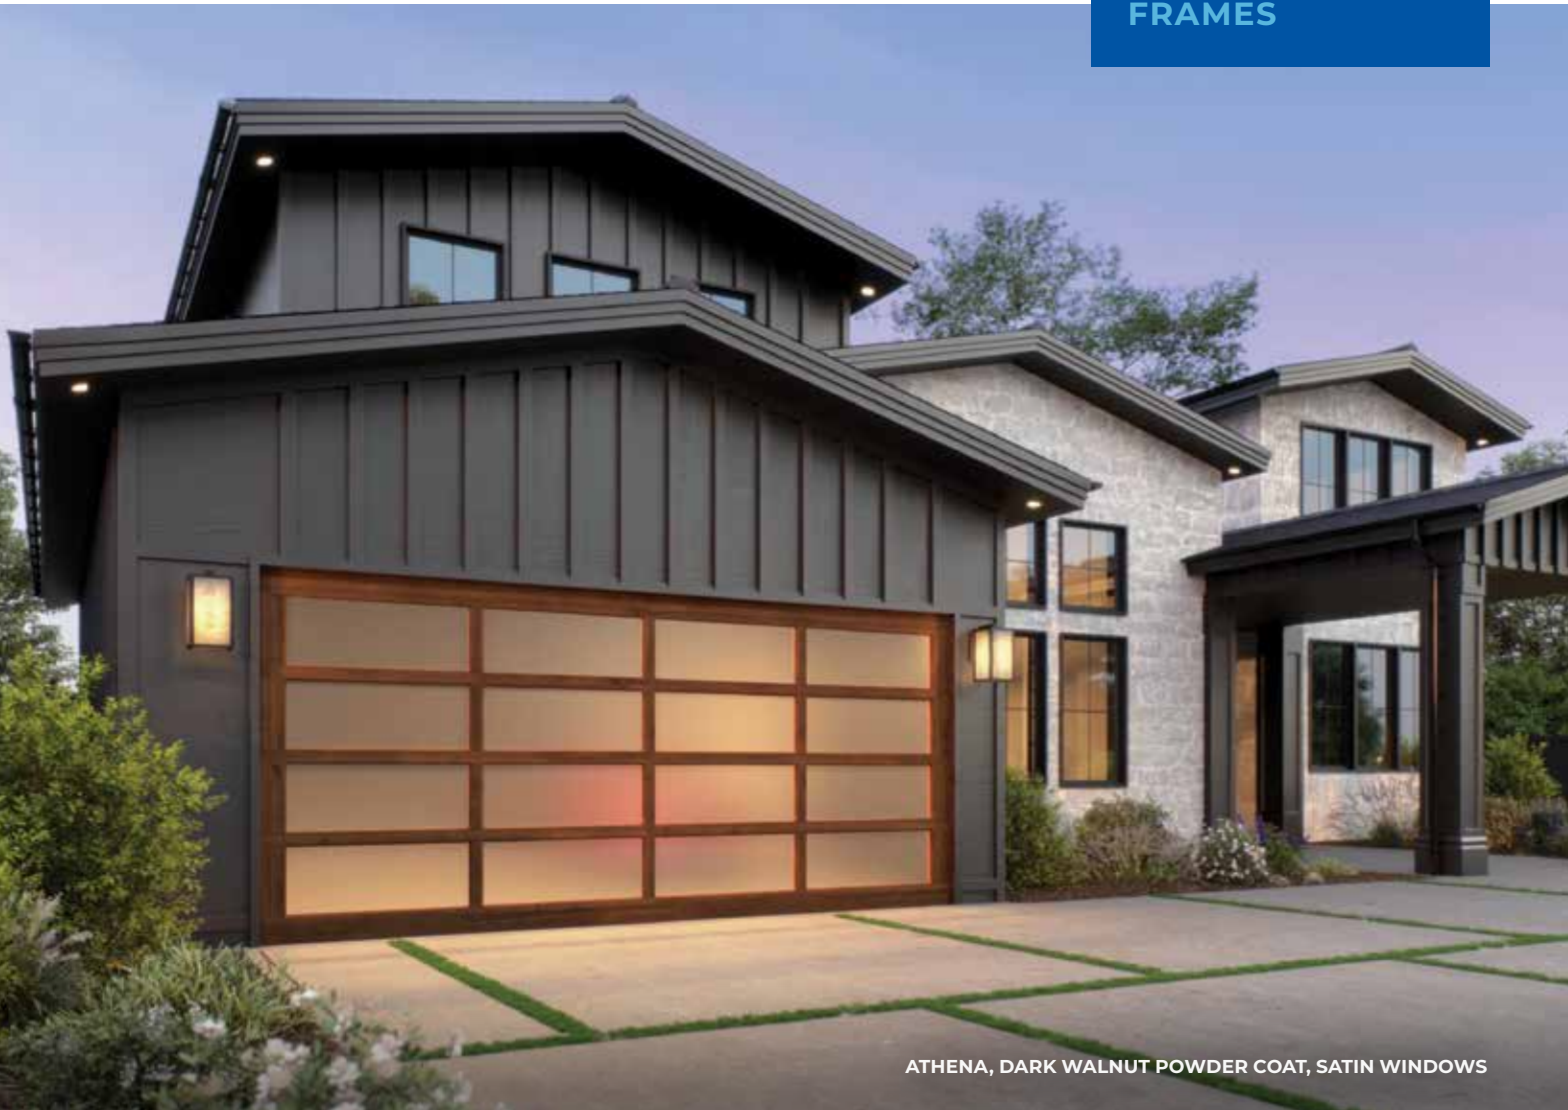

ATHENA, DARK WALNUT POWDER COAT, SATIN WINDOWS

## SPECIFICATIONS

	Athena Glass Panel
<b>U-Factor</b>	Not Tested
<b>Frame</b>	14 Ga. Aluminum
<b>Thickness</b>	2 inches
<b>Glass</b>	½ inch insulated ¼ inch non-insulated ⅜ inch non-insulated
<b>Panel</b>	—
<b>Rails</b>	Non-insulated Insulated
<b>Air Infiltration Seal</b>	•
<b>Warranty* Excludes Springs</b>	5 Years


\*For full warranty details contact your Midland dealer

## GLASS



\*Tempered only.

## LAMINATE GLASS



## SOLID POWDER COAT




## WOODGRAIN POWDER COAT



## FRAME COLORS



Printed colors may not be accurate. Contact your Midland dealer for exact color samples

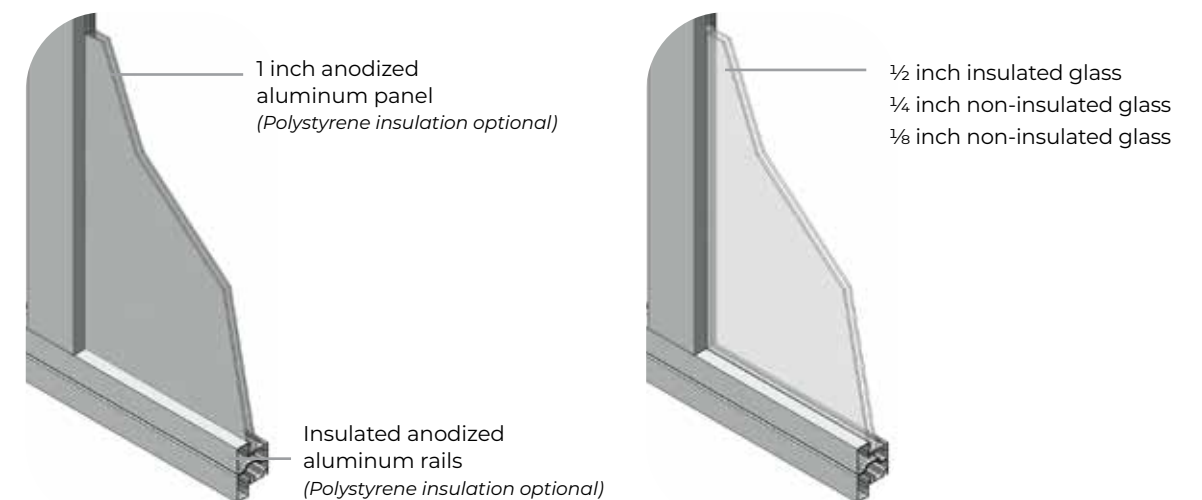


# FULLVIEW STYLIST

DRAMATIC  
ULTRA-MODERN  
UPSCALE GLASS



FULLVIEW STYLIST, DEEP BRONZE ANODIZED, SATIN GLASS

## FRAME COLORS

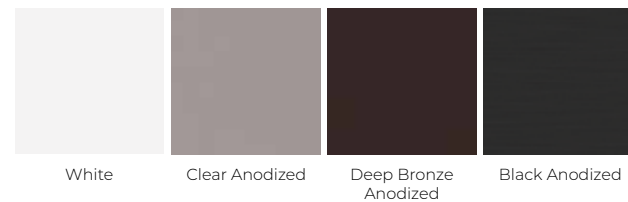

Color Select™

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

SPECIFICATIONS	Stylist
<b>U-Factor</b>	Not Tested
Frame	6063-T Aluminum
Thickness	2 inches
Stylist XL Glass	¾ inch insulated
Stylist LT Glass	½ inch insulated ¾ inch non-insulated ⅝ inch non-insulated
Panel	—
Rails	Insulated non-insulated
Air Infiltration Seal	•
Warranty* Excludes Springs	5 years

\*For full warranty details contact your Midland dealer

Stylist Cross Section\*  
\*Pictured with optional insulation



Polystyrene insulation\*

Cross linked polyethylene\*  
\*Optional

Air infiltration seal provides an energy efficient seal to help maintain building temperature

## GLASS



\*Tempered only.


## STYLIST LITE

Doors up to 7' 2" wide = 1 panel

Doors 7' 3" to 12' 2" wide = 2 panels



Doors 12' 3" to 18' 2" wide = 3 panels

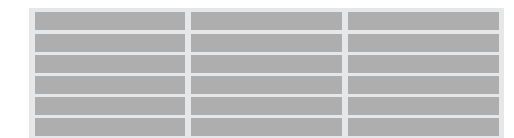

## STYLIST XL

Doors up to 10' 2" wide = 1 panel


Doors 10' 3" to 18' 2" wide = 2 panels



# SERIES 26 RIBBED

**DURABLE  
PEBBLE GRAIN  
STEEL FINISH**



SPECIFICATIONS	Series 26
<b>U-Factor</b> R-Value	<b>0.38*</b>  7.0*
Foam/Insulate	T-Bond/ Plain Steel
Thickness	2 inches
Exterior Steel	26 gauge
Interior Steel	N/A
Warranty* <i>Excludes Springs</i>	Lifetime *With T-Bond








COLORS	
White	•
Coffee	•
Color Select**	•

\*For full warranty details contact your Midland dealer



\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



**GLASS**




	
Plain	Obscure
	
Bronze	Double Dark*
	
Satin*	Gray
	
Low E	

**WINDOWS**


24" x 5"

24" x 12"

\*Tempered only.

**COLORS**

		
White	Coffee	Color Select™

Printed colors may not be accurate. Contact your Midland dealer for exact color samples

## LOCK OPTIONS




Mini Warehouse Lock pictured above.

- INSIDE LOCK**
- Side bolt door latch, attached on inside
  - Not visible from the outside
  - Harder for an intruder to tamper with
- RESIDENTIAL KEYED LOCK**
- T-handle keyed lock, attached on outside
  - Cylinder-shaped key that is difficult to reproduce
  - Impossible to operate the handle without key
- MINI WAREHOUSE LOCK**
- Side bolt door latch
  - Attached on outside of garage door
  - Latch fits with padlock

# WHY U-FACTOR MATTERS

## THE KEY TO BETTER ENERGY EFFICIENCY

R-Value is not the most accurate indicator of thermal performance in a garage door. U-Factor is commonly used in energy efficiency standards and is considered a more comprehensive and accurate metric than R-Value.

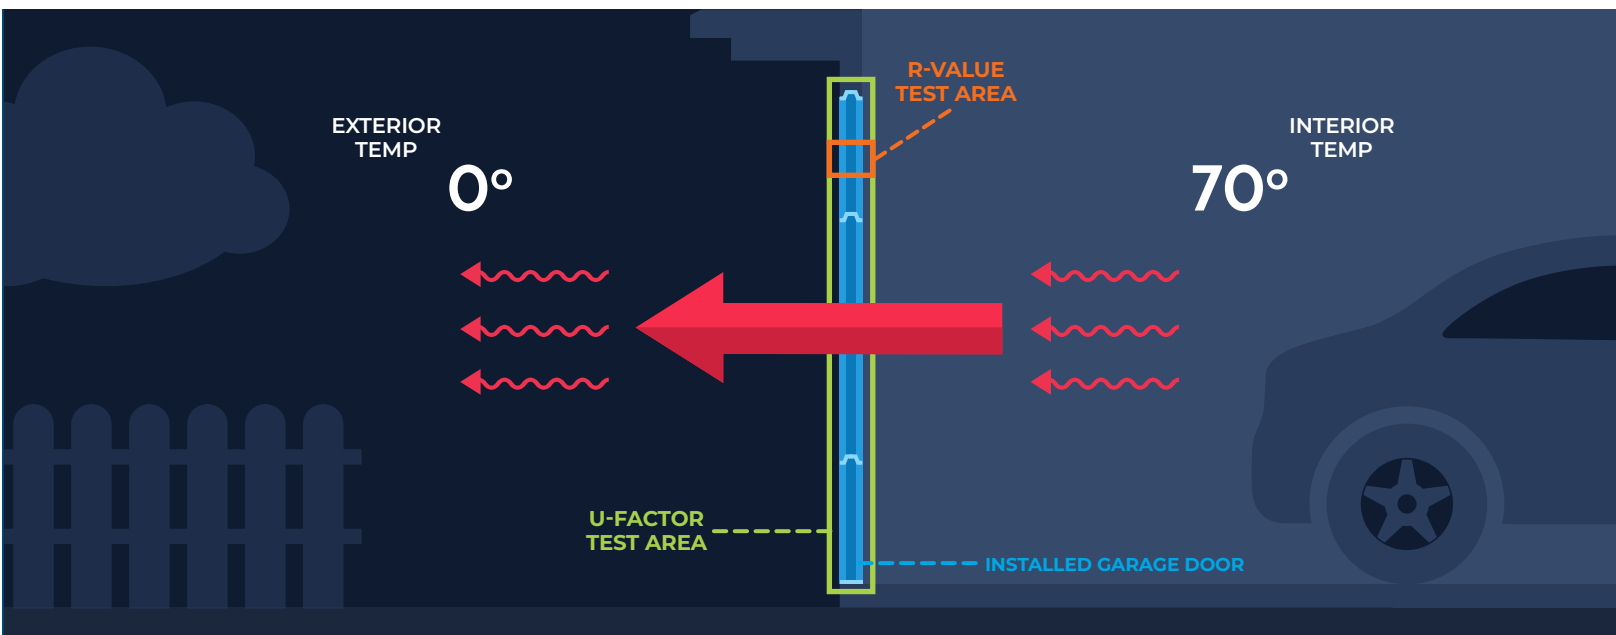


# PROTECT YOUR HOME FROM EXTREME WEATHER

Wind-rated doors are required by building codes across the country, and are increasingly in demand as consumers recognize the benefits and protection wind rated doors can provide to their home. Midland WindGuard doors are designed and tested to exceed building code requirements and withstand extreme wind events. Visit your local dealer for details.



	U-FACTOR	R-VALUE
<b>Measurement</b>	Thermal Transmittance	Thermal Resistance
<b>Definition</b>	Measures how much heat loss occurs	Calculates how resistant the door is to heat loss
<b>Testing Standards</b>	Third party testing with strict guidelines and inspection	Unregulated with no standard guidelines
<b>Testing Area</b>	Entire installed garage door is tested	Small section is tested and used for resistance calculation
<b>Values</b>	Lower U-factor means better thermal performance	Higher R-value means better thermal performance
<b>Best Application</b>	Complex assemblies like windows and doors	Simple elements of building assemblies like insulation
<b>Reflects Entire Door Performance</b>	✓	
<b>Verified By DASMA</b> <small>Door &amp; Access Systems Manufacturers Association</small>	✓	



### THERMAL PERFORMANCE VERIFICATION PROGRAM

Is a program to certify and verify the thermal performance ratings of sectional doors. Products included in this program will have a badge, label or icon.



**VERIFY LOCAL BUILDING CODES**  
States, cities and counties have different jurisdictions with different building codes, always check with local building officials


**STORM PRESSURES**  
Storms generate both positive and negative pressures on a garage door. Positive pressures try to push the garage door in, while negative pressures try to pull the garage door out

**NON-RATED DOOR RISKS**  
High winds can cause un-reinforced garage doors to buckle and come out of their tracks, which can lead to a buildup of pressure that damages the roof and supporting walls

**WIND RATING STANDARDS**  
Wind speeds are defined by the International Building Code. Wind pressures include wind speed and other factors like building height, door area, building location, risk category, and exposure category


**STRUCTURAL PROTECTION**  
A wind rated door's purpose is to remain operable after a high wind event so occupants can escape. It also offers protection by reducing the chance of high internal wind pressures from tearing structures apart



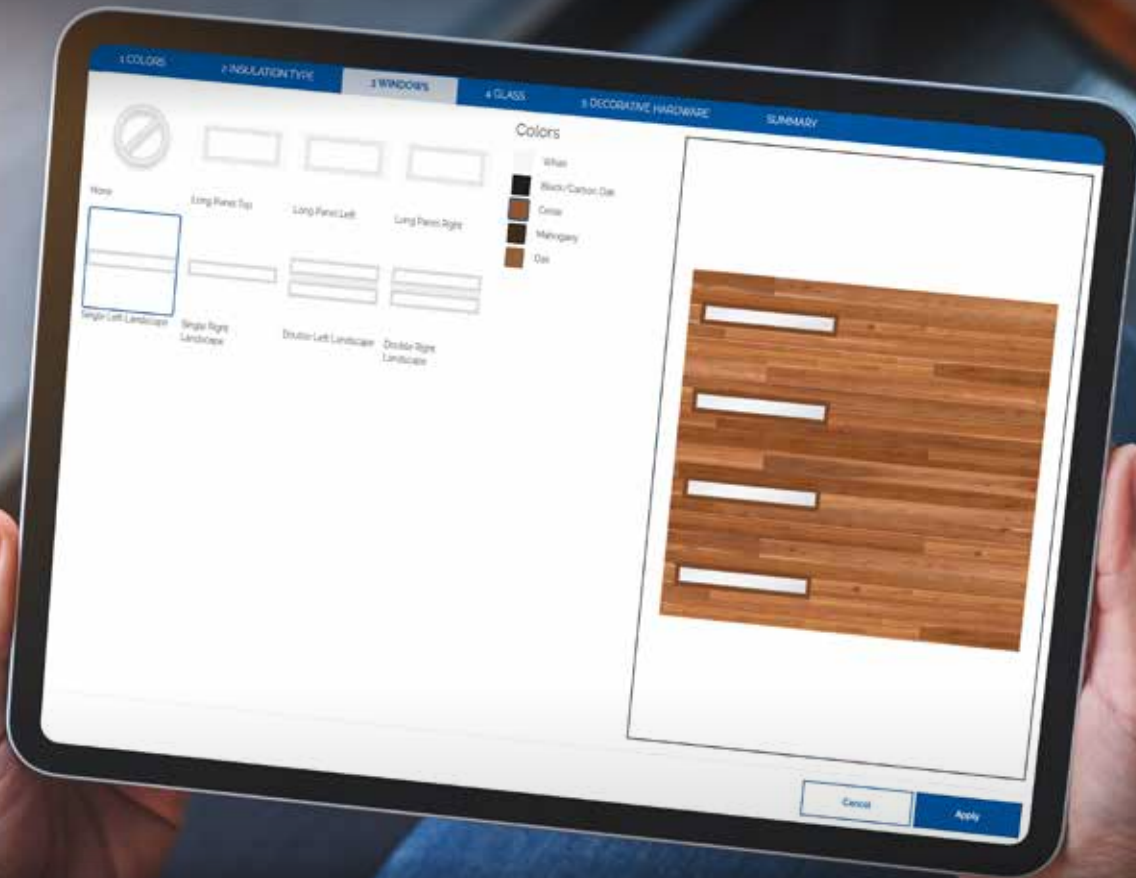


# FROM *Imagination* TO INSTALLATION

## DESIGN YOUR PERFECT DOOR

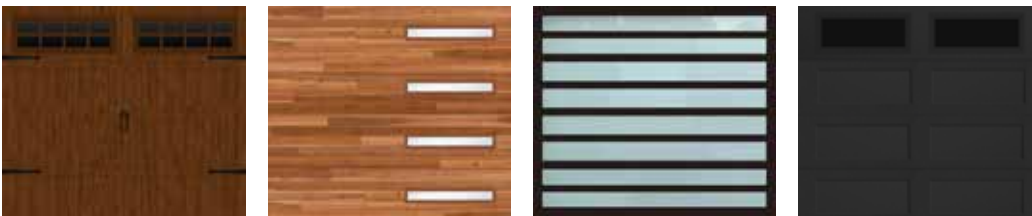

Choose from an assortment of styles and features to perfectly compliment the exterior of your home. Go to [midlandgaragedoor.com](http://midlandgaragedoor.com) today to get started designing your quality door.

DESIGN NOW



[midlandgaragedoor.com](http://midlandgaragedoor.com)